

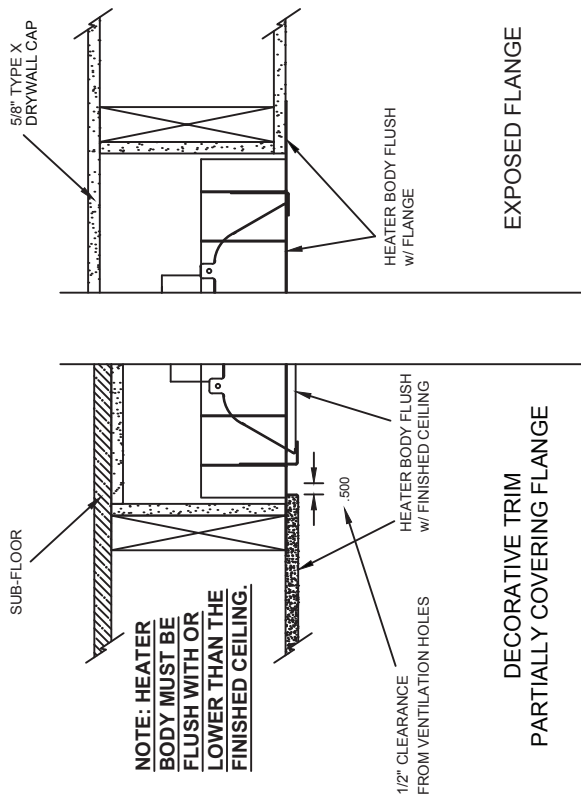


INSTALLATION TYPES

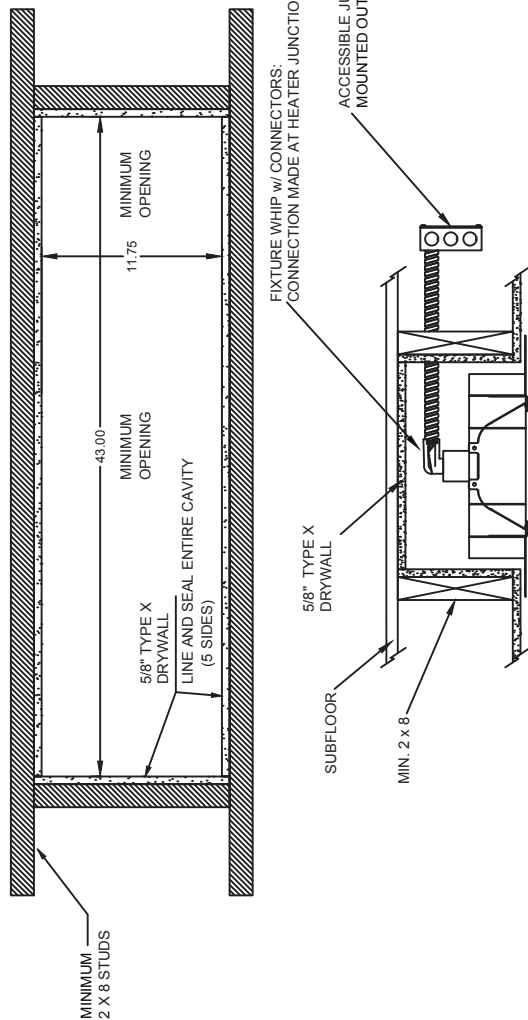

DECORATIVE TRIM
PARTIALLY COVERING FLANGE

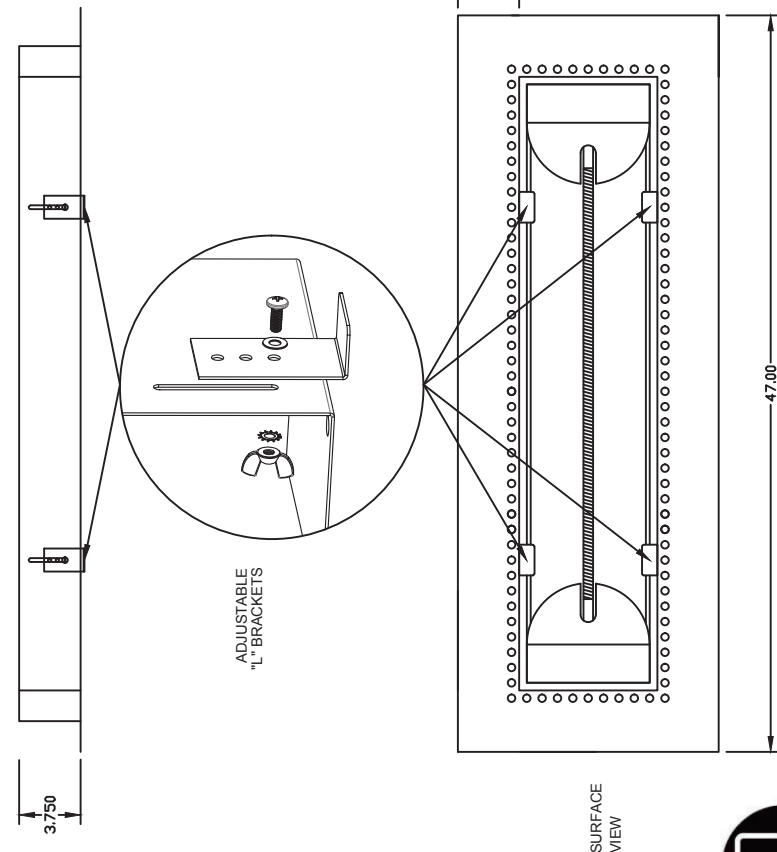

BACKSIDE VIEW

WARNINGS:

- Do not use Surface Mount Brackets.
- This Frame is ONLY to be used on a flat non-sloped ceiling.
- Heater Body must face straight down and be flush with the finished ceiling.
- Frame and Heater cannot be installed on a pitched angle.
- Accessible Junction Box must be installed outside of sealed drywall pocket.
- Must use 5/8" type "X" drywall.
- Must use supplied 4 foot Hi-Temp Fixture Whip and Hi-Temp Ceramic Wire Nuts.
- Please contact factory for longer length Hi-Temp Fixture Whips available for purchase.
- Discard Surface Mounting Brackets provided with Heater and use "L" Brackets.
- Use Licensed Electrician ONLY.

After 4 hours of continuous use, a 15 minute cool down period is recommended for maximum heater longevity. See controls brochure for timer options.

NOTES:

- Heater suspends (Gravity) by resting on adjustable "L" Brackets in flush mount fixture.
- Mounting holes on Surface Flange to be determined and drilled by Contractor/Installer.
- Coil excess flex into heater cavity.

INFRA TECH
344 W 157th Street
Gardena, California 90248
Phone: (310) 354-1250
Fax: (310) 523-3674
www.infra-tech-usa.com

ITEM #: 18-2300 MATERIAL: 304 S.S. #4 FINISH
DESCRIPTION: W-39 FLUSH MOUNT FRAME (FOR USE WITH 39" HEATERS)

NOTES: SUPPLIED w/ HI-TEMP FIXTURE WHIP

DATE: Dec. 16, 2019 SCALE: N/A DRAWN BY: CL

